

• Surface - Down light



80 CRI


PRODUCT HIGHLIGHTS

- Surface / Pendant moisture proof IP65 luminaire
- Consist of polycarbonate housing with PMMA top diffuser
- High efficacy SMD LED - >140 lm/W LED and good colour rendering
- High efficiency electronic in-build driver
- Internal powder coated reflector and driver try



TECHNICAL SPECIFICATIONS

Light Source	: MPL - Mid Power LED
Power Consumption	: 40w, 60w,
Color Temperature	: 4000 K 6500 K
Lumens	40w : 3391 lm, 3570 lm 60w : 5520 lm, 5640 lm
Driver	: Constant current AC - DC
Input voltage range	: 220 - 240 V
Output voltage	: 33V - 39V DC
Output Current	: 1000 mA 1500 mA
Power Factor	: >0.98
THD	: <10%

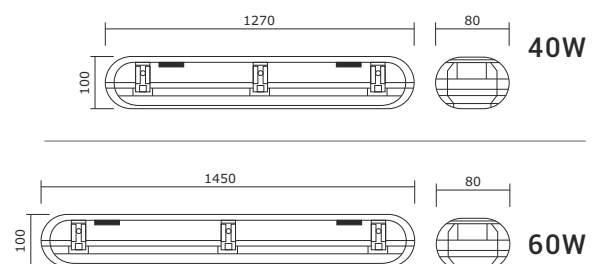

All dimensions are in mm

Product Application : Factory | Warehouse